


Use : The Tie Down Strap is designed to restraint in safety conditions your cargo on air cargo pallets and/or aircraft structure.

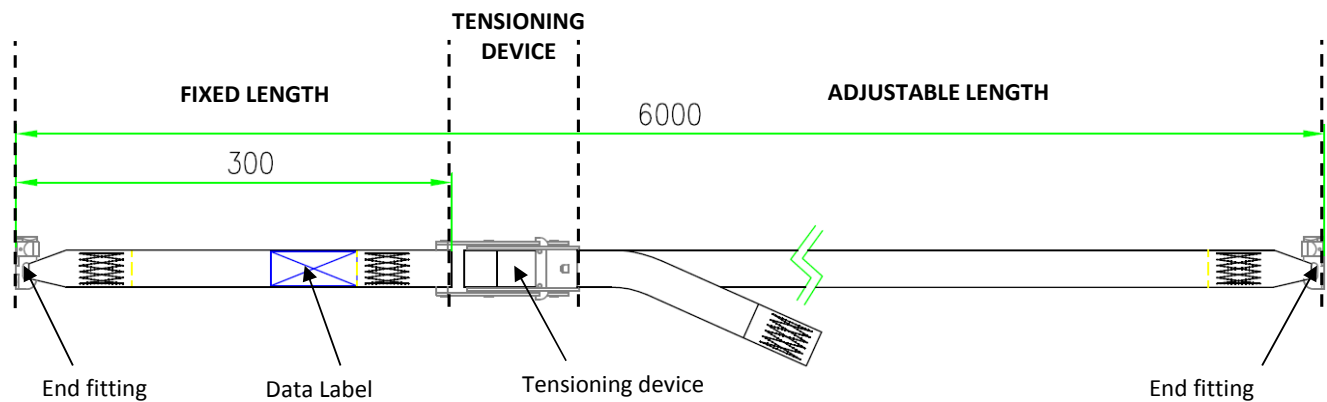

Technical specifications

Length: Adjustable from 0,5 meter to 6 meters.

Webbing: Polyester – 44 mm width – Natural white.

End fitting : Double Stud Fitting (DSF acc. ISO 9788) on the fixed length and
Double Stud Fitting (DSF acc. ISO 9788) on the adjustable length.

Tensioning device: Over Center Buckle.

Protection: Silver zinc coated – Chrome 6 free.

Strength: > 2250 daN / 5000 Lbs (UL).

Elongation: < 10 % when submitted at UL.

Environmental degradation: All hardware are protected against corrosion.
A safety factor is applied on the webbing (min. 35% more than UL) to prevent deterioration during service life.

Burning rate: ≤ 2,5 inches per min. / ≤ 63 mm per min.

Data label: The data label contains all the elements for traceability and service life.

Marking: No marking.

Packaging: Each strap is rolled individually and collective packed on a cartboard box.