


Use : The Tie Down Strap is designed to restraint in safety conditions your cargo on air cargo pallets and/or aircraft structure.

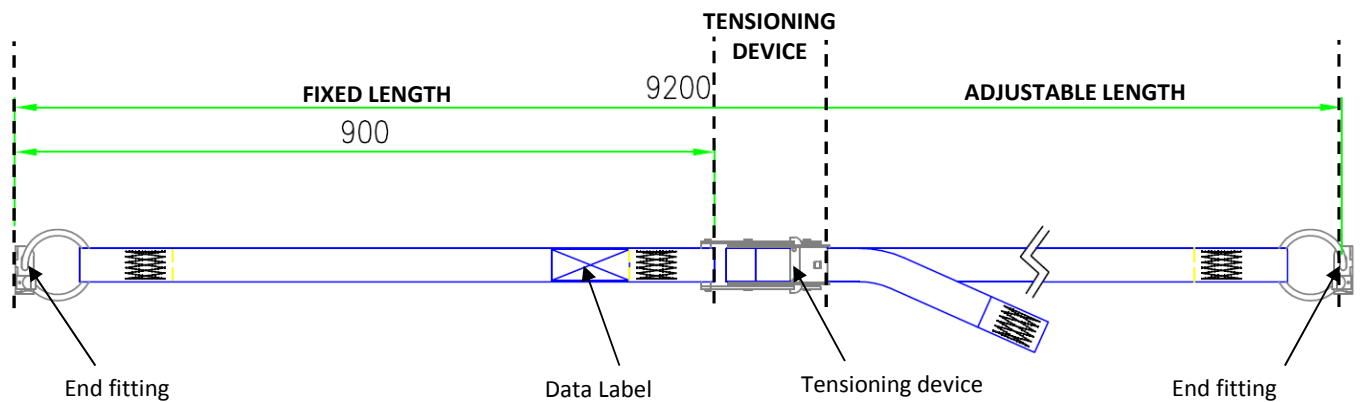

Technical specifications

Length: Adjustable from 1 meter to 9,2 meters.

Webbing: Polyester – 44 mm width – Blue RAL5010.

End fitting : Double Stud Fitting with Round Ring (DSF acc. ISO 9788) on the fixed length and
Double Stud Fitting with Round Ring (DSF acc. ISO 9788) on the adjustable length.

Tensioning device: Over Center Buckle.

Protection: Silver zinc coated – Chrome 6 free.

Strength: > 2250 daN / 5000 Lbs (UL).

Elongation: < 10 % when submitted at UL.

Environmental degradation: All hardware are protected against corrosion.
A safety factor is applied on the webbing (min. 35% more than UL) to prevent deterioration during service life.

Burning rate: ≤ 2,5 inches per min. / ≤ 63 mm per min.

Data label: The data label contains all the elements for traceability and service life.

Marking: Logo company or resistance repeated at regular intervals.

Packaging: Each strap is rolled individually and collective packed on a cartboard box.